

KOPAL® CRAMPONS DOUBLE ACTION



Fraisez les mors selon la forme de votre pièce !




● MORS USINABLES

A		B	C	D	E	F	G	Fixation	Puissance de serrage Newton	Couple de serrage N/m	Dureté Hrc	Réf.
min.	max.						Usinage Maxi					
33	35 37	15	21	17,5	29	1	3	M8	22000	44	30-34	OK-028
52	55 59	22	41	26	41	2	5	M12	55000	145	30-34	OK-008
67	71 75	29	42	34	56	3	5	M16	100000	360	30-34	OK-012

⚠ *Vis vendue séparément*

BRIDAGE HORIZONTAL 2

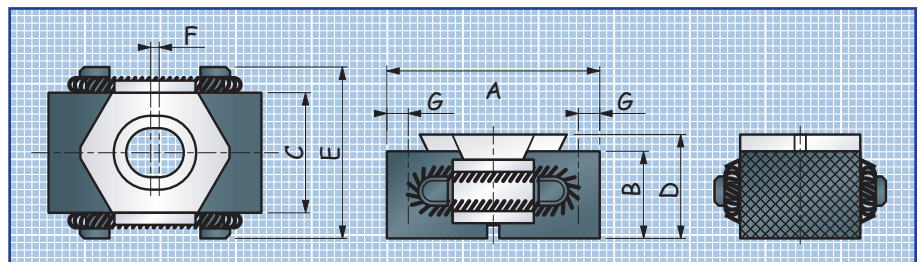

10 Tonnes
100000 Newton

Vis de serrage

M5 x 20	99-606
M8 x 25	99-639
M12 x 45	99-672
M12 x 60	99-675
M16 x 55	99-676
M16 x 75	99-677




vis classe 12/9



● POUR MORS RAPPORTÉS

A		B	C	D	E	F	G	H	I	J	Fixation	Puissance de serrage Newton	Couple de serrage N/m	Réf.
min.	max.													
33	35 37	15	21	17,5	29	1	M 5	21	7,5	12	M8	22000	43	OK-044
46	49 53	22	30	26	41	2	M 5	28	11	18	M12	55000	145	OK-046
61	65 70	29	42	34	56	3	M 5	40	14,5	26	M16	100000	360	OK-048

⚠ *Vis vendue séparément*

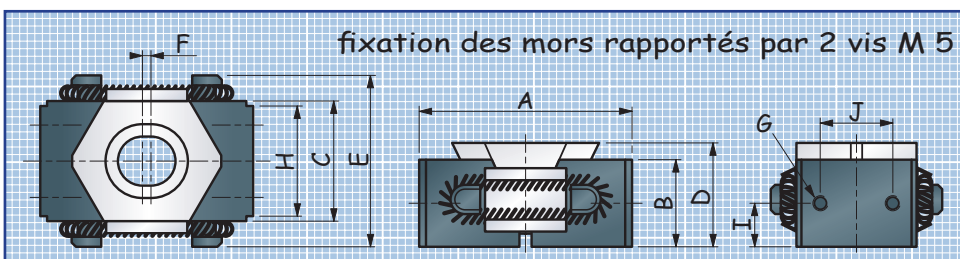

Fabriquez vos mors doux ou adaptés à la forme de la pièce !

